


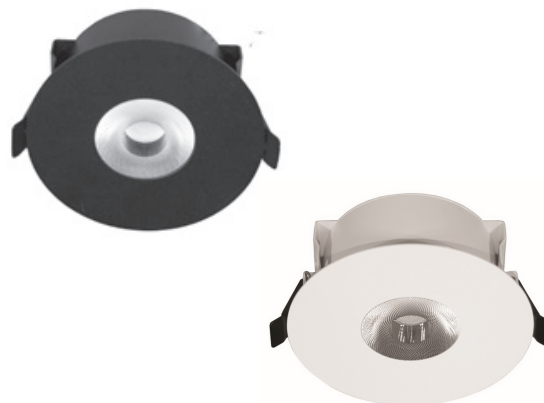

LED fittings

Body:

Aluminium profile finished in black RAL 9005, also available in white RAL 9003, silver RAL 9006 or anthracite RAL 7016 on request


Optic:

N - narrow beam

W - wide beam

Application:

Aluminium tubular fittings for direct or direct/indirect light distribution. Intended to illumination of representative work places, residential applications or decorative lighting.

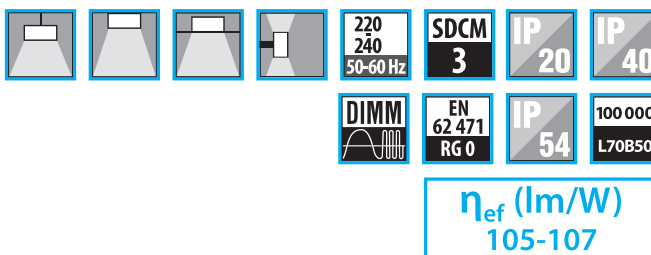


2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	×	×	×	●
ON OFF	1-10V	DALI	Bluetooth	3-Phase	Beam Spread	INT	EXT	Beam Spread
●	×	○	×	×	×	×	×	×

● default


○ optional

×



PAR D	W	lm	Ø	A	kg
PAR D700	7	750	125	54	0,6
PAR D1000	10	1 050			
PAR D1500	14	1 500			



PAR1500N



PAR1500W



Dimension of assembly hole 110 mm

Code: PAR1000N3C/DI/ND/54

PAR D	1000	N	3	C	/DI	/ND	/54
Luminaire type: PAR D = recessed	Light output (lm)	Optic: N - narrow beam 35° W - wide beam 55°	Color temperature: 2 = 2700 K 3 = 3000 K 4 = 4000 K 5 = 5700 K	Color: C - black RAL 9005 S - silver RAL 9006 B - white RAL 9003 A - anthracite RAL 7016	Version: DI = direct-indirect	Driver type: ND - non-dimmable DALI - dimmable DALI	IP protection: IP54 - available for PAR D (on request)