




# NALS

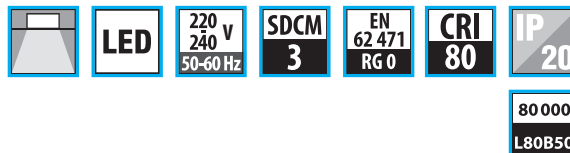

$\eta_{ef}$  (lm/W)  
147



NARROW



WIDE

## Linear luminaire with mini-optic for SAPP ceiling

**Body:**  
Aluminium profile body painted in white or black  
(another RALs by request)


**Louvre:**  
CM - matt black  
BM - matt white

**Optical system:**  
30 - narrow lighting characteristic 30 degrees  
80 - wide lighting characteristic 80 degrees

**Application:**  
For recessed installation with special clips for  
SAPP type ceiling

**Versions:**  
Standart version is in configuration one  
luminaire/one driver  
POLY2 - 1 driver for two luminaires

**Additional note:**  
Luminaires are delivered with black cable  
between luminaire and driver, lenght 50 cm  
POLY2 version is delivered with black cable  
between luminaire and driver, lenght 150 cm

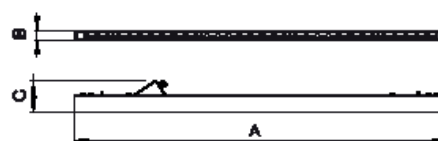

| NALS       | W  | CM80 | BM80 | CM30 | BM30 | A    | B  | C  |
|------------|----|------|------|------|------|------|----|----|
| NALS1000S  | 8  | 881  | 1050 | 1040 | 1110 | 564  | 21 | 56 |
| NALS1500XM | 12 | 1420 | 1600 | 1600 | 1650 | 844  |    |    |
| NALS2000M  | 15 | 1900 | 2150 | 2100 | 2200 | 1124 |    |    |
| NALS2500M  | 24 | 2750 | 3100 | 3000 | 3200 | 1124 |    |    |
| NALS3000L  | 22 | 2800 | 3150 | 3050 | 3250 | 1684 |    |    |
| NALS4000L  | 33 | 3900 | 4400 | 4300 | 4550 | 1684 |    |    |

lm - luminaire light output

| 2200      | 2700  | 3000 | 4000      | 5700 | 6500 | MIX | RGB |        |
|-----------|-------|------|-----------|------|------|-----|-----|--------|
| ×         | ○     | ○    | ●         | ○    | ○    | ○   | ×   | ●      |
| ON<br>OFF | 1-10V | DALI | Bluetooth | Mesh | Beam | INT | EXT | Dimmer |
| ●         | ×     | ○    | ○         | ×    | ×    | ×   | ×   | ○      |

● default ○ optional × not possible

