



Base: Grey PC base with stainless steel suspension brackets (AISI 304)
 - Triangles for suspension brackets
 - 1 gland M20


Diffuser: Frosted PC with UV protection

Gear tray: White painted steel

Clips: 2-part stainless steel clips (AISI 304)

Specifications:

- Dip switch SELV driver with 4 output currents
Non-dimmable
- Product life min. 50.000h L70 B50 at T_{LB}.
- Available in 4000K with CRI of > 80
- MacAdam 5 SDCM
- Luminous efficiency:
LER frosted diff. up to 120 lm/W.
- 220-240V 50/60 Hz.
- Ta: -20°C +40°C.
- PF > 0,9
- Max number of luminaires for MCB16A type B
 - 600mm: 47
 - 1200mm: 21
 - 1500mm: 15



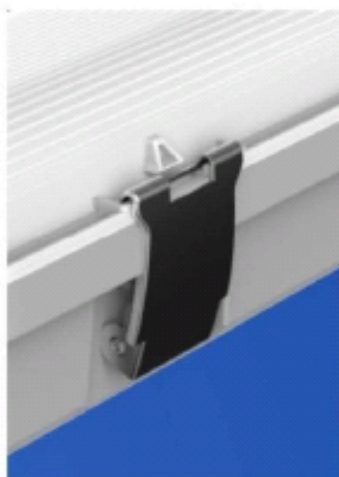



Stainless steel clip

Housing	L	W*	H	Lf	Clips	Kg
600	665	110	70	400	6	1.05
1200	1265	110	70	850	10	1.35
1500	1565	110	70	950	12	1.59

*Dimensions without clips

Tolerance on Lf: PC +/- 2 cm always with bracket.

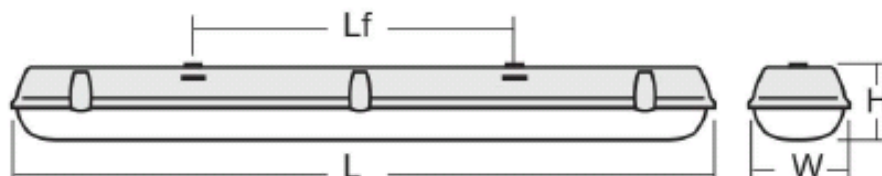

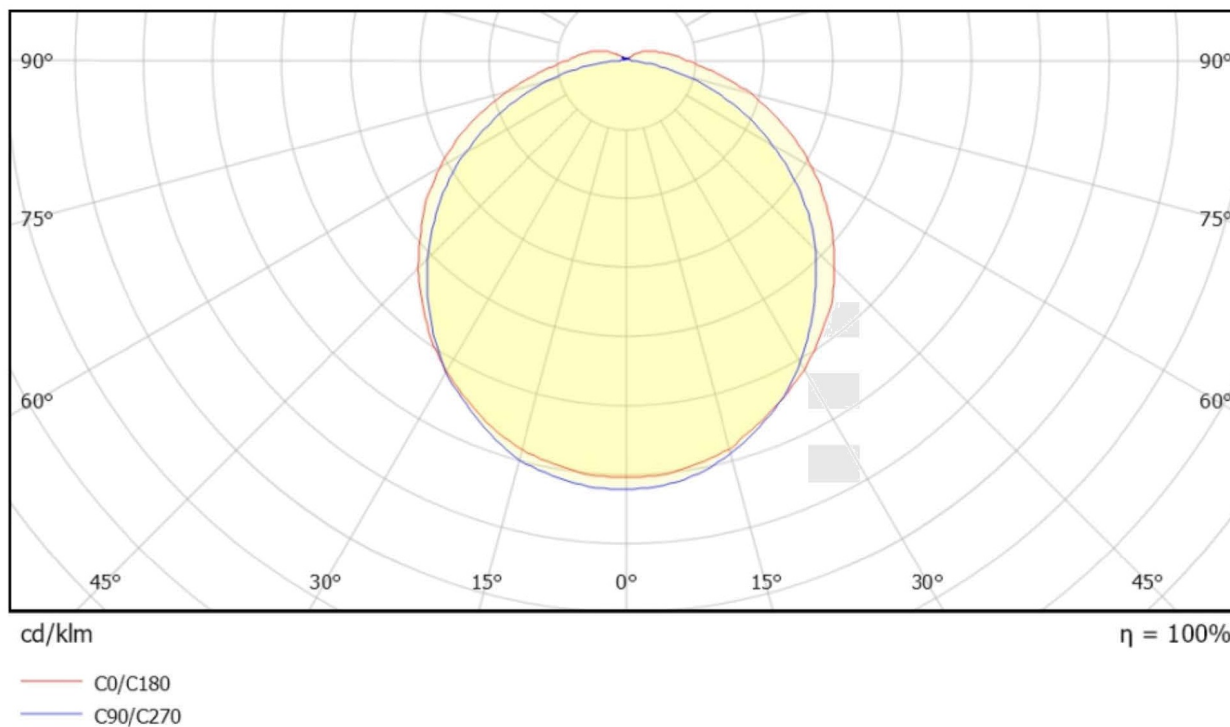

Housing	Power ⁽¹⁾	Flux ⁽²⁾	T _{LB} ⁽³⁾	EEC-LED ⁽⁵⁾
600	11 W	1320 lm	40°C	D
	14 W	1680 lm	40°C	D
	17 W	2040 lm	40°C	D
	20 W	2400 lm	40°C	D
1200	22 W	2640 lm	40°C	D
	28 W	3360 lm	40°C	D
	34 W	4080 lm	40°C	D
	40 W	4800 lm	40°C	D
1500	33 W	3960 lm	40°C	D
	42 W	5040 lm	40°C	D
	51 W	6120 lm	40°C	D
	60 W	7200 lm	40°C	D

(1) Total power consumption of LED's and driver. (+/- 10%)

(2) Luminous flux of fitting @ 25°C for 840

Luminous output and electrical load have an initial tolerance of +/- 10 % from nominal.

(3) T_{LB} is the maximum ambient temperature Ta(°C) for continuous use to achieve the total lifetime (LB) of the LED components.

(5) This product contains a light source of energy efficiency class D.