


Technical data sheet

Plast B

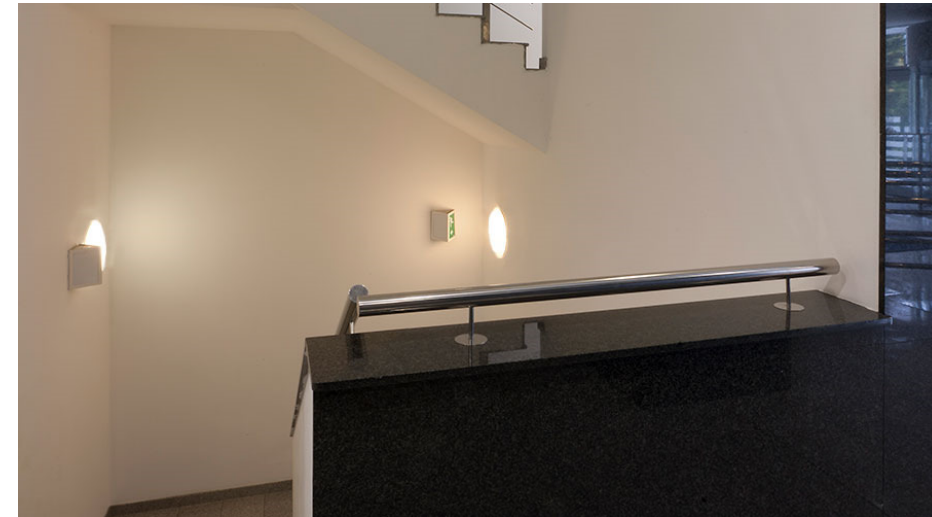

Mounting

Ceiling Surfaced / Wall mounted

Light Source

LED

Driver

Electronic Control Gear Fix

Materials

Housing: PC

Diffuser: PC

Protection Degree

IP54

Ambient Temperature

-20°C - +35°C

Input Voltage

220-240V 50/60Hz

Lifetime

40.000h L70/B50




Cooling

Passive

Accessories

Emergency 3H

Microwave Sensor

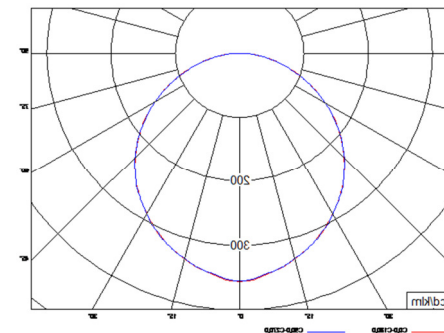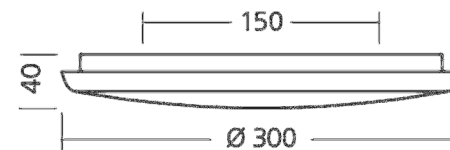

Plast B

Type	Net. Lumen Output (lm)	Power Consumption (W)	System Efficiency (lm/W)	CRI (Ra)	CCT (K)
Plast B 25W 830	2200	25	88	>80	3000
Plast B 25W 840	2300	25	92	>80	4000