




PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Ledline
MODULE LIFETIME	Approx. 50.000 hours
DRIVER LEDLINE	Including Philips Xitanium driver
COLORS (Δ)	<input type="radio"/> 3 = RAL 9003 white <input type="radio"/> 5 = RAL 9005 black <input type="radio"/> 6 = RAL 9006 alu
REFLECTOR	Aluminium white
ADJUSTABLE	No
SIZE	868/1149/1430 X 40 X 92mm

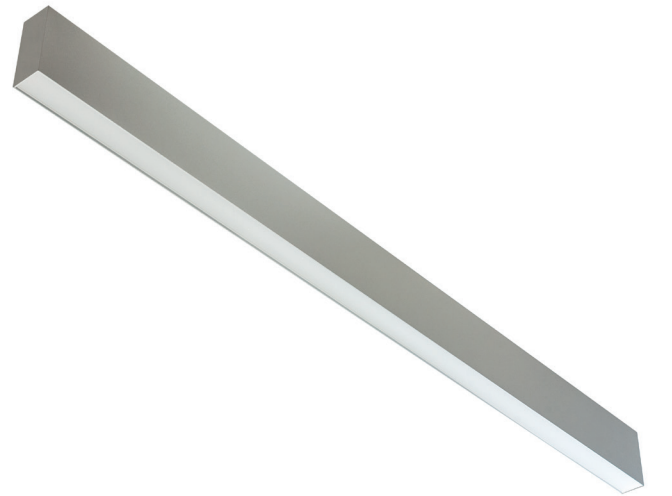

PROFILE 4

OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%	
EMERGENCY BALLAST	Art. nr.: 0187.003.01.0 - 1 hour	
DIMMABLE	DALI dimmable	On request
DIFFUSER	White acrylic diffuser in standard Acrylic frosted, microprismatic or any other on request	
UGR DIFFUSER	UGR<19 diffuser on request	
IP CLASS	IP20 in standard, IP44 on request	
MOVEMENT SENSOR	On request	
DAYLIGHT CONTROL SENSOR	On request	
SUSPENSION SET/WIRES	2 steel wires + power cable	€ 45,00
	standard length 1500mm	

INFORMATION

WARRANTY	5 Years
-----------------	---------


This luminaire can be mounted directly to the ceiling or pendant with steel wires and can be connected to form long LED lighting lines.

We can produce this luminaire in different lengths and shapes on request


Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.



Profile UP/DN version

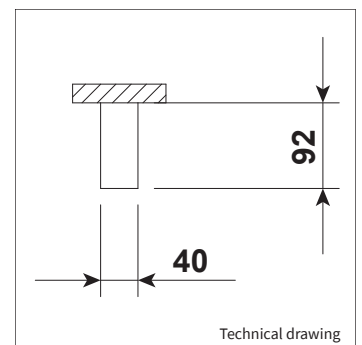

Technical drawing



White acrylic

Acrylic frosted

Microprismatic



Suspension set



Powercable

ART.NR.	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOUR TEMPERATURE	CRI	TC LIFETIME	LENGTH
SURFACE MOUNTED									
Δ see colors									
9265.868.30.Δ	Ledline	Philips	3300lm	23W	143lm/W	3000K	>80	50.000 Hrs	868mm
9265.868.40.Δ	Ledline	Philips	3300lm	23W	143lm/W	4000K	>80	50.000 Hrs	868mm
9265.114.30.Δ	Ledline	Philips	4400lm	29W	152lm/W	3000K	>80	50.000 Hrs	1149mm
9265.114.40.Δ	Ledline	Philips	4400lm	29W	152lm/W	4000K	>80	50.000 Hrs	1149mm
9265.143.30.Δ	Ledline	Philips	5500lm	36W	153lm/W	3000K	>80	50.000 Hrs	1430mm
9265.143.40.Δ	Ledline	Philips	5500lm	36W	153lm/W	4000K	>80	50.000 Hrs	1430mm
SUSPENDED UP/DN									
9266.114.30.Δ	Ledline	Philips	6600lm	44W	150lm/W	3000K	>80	50.000 Hrs	1149mm
9266.114.40.Δ	Ledline	Philips	6600lm	44W	150lm/W	4000K	>80	50.000 Hrs	1149mm
9266.143.30.Δ	Ledline	Philips	8800lm	58W	152lm/W	3000K	>80	50.000 Hrs	1430mm
9266.143.40.Δ	Ledline	Philips	8800lm	58W	152lm/W	4000K	>80	50.000 Hrs	1430mm