



Game M

η_{ef} (lm/W)
169-186

Industrial LED Highbay

Body:

Powder painted non-corrosive high-pressure die-cast aluminium with steel endcaps and gear box

Optic:

EN- extra narrow beam 30°

N - narrow beam 60°

W - wide beam 90°

EWM - extra wide matt 110°

AS - asymmetric

Application:

Ceiling installation as standard

Pendant or wall installation using accessories

Accessories:

GAME/SD - set of movable wall brackets

GAME/VL - set of holders for installation on a horizontal rope

GAME/HAK - set of hooks for a chain suspensions




2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	○	×	●
ON/OFF	1-10V	DALI	Bluetooth	Mesh	Beam	INT	EXT	Beam
●	×	○	○	×	○	○	×	×


● default

○ optional


×

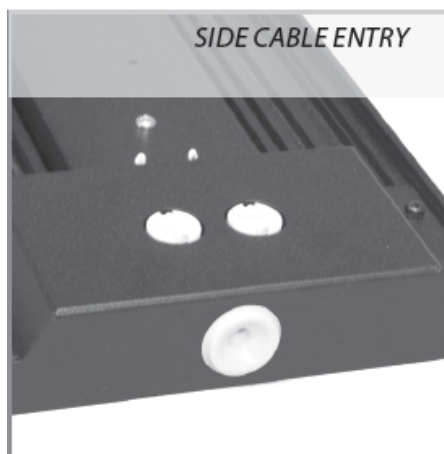


SIDE CABLE ENTRY

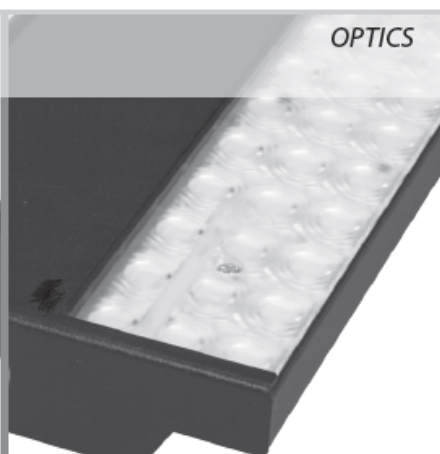


OPTICS

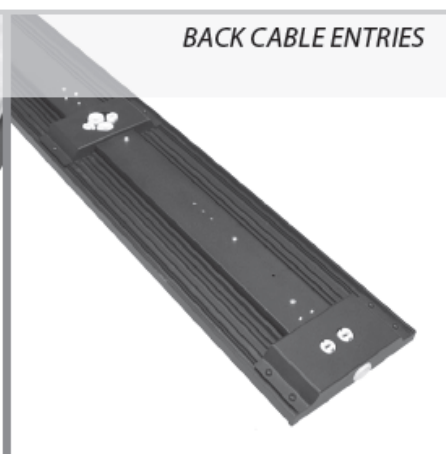


BACK CABLE ENTRIES




GAME N60



GAME W90




GAME EW110




GAME AS

GAME	Modul	W	lm			A	B	C	X	Y	R	kg
			N / EW	W	AS							
GAME180 MULTI	M8 (2x4)	60 • 72 85 • 98	11 100 • 13 200 15 800 • 17 900	11 000 • 13 000 15 500 • 17 500	10 700 • 12 600 15 000 • 16 900	1165	213	42	1080	30	900	5,2
GAME250 MULTI	XL10 (2x5)	82 • 95 110 • 128 145	15 000 • 17 000 19 500 • 22 000 24 500	14 800 • 16 700 19 200 • 21 600 24 000	14 500 • 16 300 18 700 • 21 000 23 700	1450			1370		1020	6,3


 GAME	Modul	W	lm			A	B	C	X	Y	R	kg
			N / EW	W	AS							
GAME080	S4 (2x2)	45	7 800	7 600	7 400	590	213	42	505	30	360	3,5
GAME150	S8 (4x2)	89	15 800	15 500	15 000		345				5	
GAME150	M8 (2x4)	89	15 800	15 500	15 000	1165	213		1080		900	5,2
GAME200	XL10 (2x5)	110	19 800	19 400	18 800	1450			1370		1020	6,3
GAME250	XL10 (2x5)	145	24 500	24 000	23 300				790		800	7,5
GAME250	XM12 (4x3)	148	26 000	25 500	24 700	875	345		1650		1160	
GAME250	L12 (2x6)	148	26 000	25 500	24 700	1735	213		1650		1160	7,5
GAME300	L12 (2x6)	176	29 800	29 200	28 300							
GAME350	M16 (4x4)	196	34 500	33 800	32 800	1165	345		1080		900	9

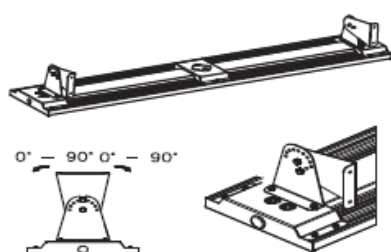

GAME/SD

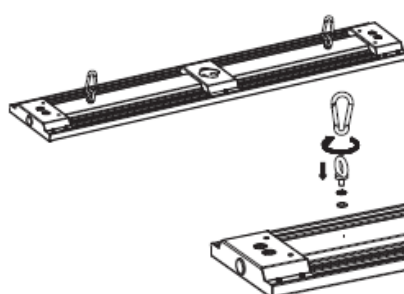

GAME/HAK

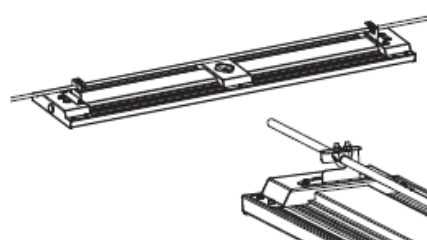

GAME/VL

LED	LED
LED	LED

S4 (2x2)

LED	LED	LED	LED
LED	LED	LED	LED


M8 (2x4)

LED	LED
LED	LED
LED	LED
LED	LED

S8 (4x2)

LED	LED	LED	LED
LED	LED	LED	LED
LED	LED	LED	LED
LED	LED	LED	LED

M16 (4x4)

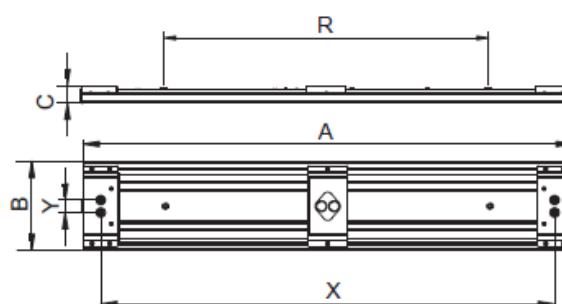



Code: GAME 150M8/4W90C/90/P

GAME	150	M	8	/4	W90	C	/ND	/P
Luminaire type								
Light output								
Body								
		S – 585 mm						
		M – 1165 mm						
		L – 1735 mm						
Nr. of LED modules								
Color temperature								
		2 = 2700 K						
		3 = 3000 K						
		4 = 4000 K						
		5 = 5700 K						
		6 = 6500 K						
Optic:								
		N – narrow beam 60°						
		W – wide beam 90°						
		EW – extra wide beam 110°						
		AS – asymmetric						
Color:								
		C – black						
		S – silver						
		B – white						
Driver type:								
		ND – fix output						
		DALI – controllable						
		NDMULT – luminaire with switchable power						
Specifications:								
		/P – through wiring						